

SHOWERDEC®

Wetroom shower areas with exceptional strength, up to 100 stone / 635kg.

- A level access wetroom shower area concealed beneath the vinyl or tiled flooring once installed.
- Tested to withstand **100 Stone / 635Kg** across the entire surface area to simulate a standing person.
- **No** additional support needed around the waste assisting ease & speed of installation.*
- **24mm** thick to facilitate installation with existing floorboards.
- 40mm flat area around the floor former perimeter for door placement & water retention.
- Larger shower area, ideal for wheelchairs.
- Range of half height shower doors available, see pages 24 - 27.
- Supplied **without** a waste, see below right for waste options.
- Lifetime guarantee.
- Floor formers are not handed.

*Tested in accordance with a standard floor with 16" joist centres of 47mm width & supported around the floor former outer edges. No additional support around the waste area.

INSTALLER FRIENDLY

- No raised collar around the underside of the waste making installation on timber floors easier.
- Circular ribbed underside designed for setting into a concrete or screed base and eliminates slippage when installing.
- Textured top surface allows excellent adhesion of vinyl flooring.
- Offset waste positions to avoid joists.
- Excellent falls of approximately 2% - 2.5% built into the top surface - **'BEST IN CLASS'**.
- Pre-formed semi-drilled fixing points for secure installation.
- Can be cut to size in virtually any position using a circular saw or jigsaw.
- Suitable for timber & screeded floors.



Not handed
Showerdec® 1300x800mm
illustrated.
Ref: SD1300x800

Pre-formed semi drilled fixing points for easy installation.



ShowerDec® cross section detail.



Remove part of existing floor & make the 24mm ShowerDec® absolutely level using plywood.

WASTE OPTIONS












2 part, 50mm water seal, CTW01 gravity waste **can** be supplied on request. Flow rate in excess of 26 l/m.

For more gravity & pumped waste options please see pages 46 - 47.



SHOWERDEC® & DOOR® OPTIONS

The matrix, below right, indicates door options that can be used with each ShowerDec® floor former. **PLEASE NOTE:** ShowerDec® is not supplied with a waste as standard.

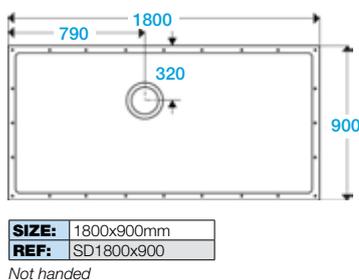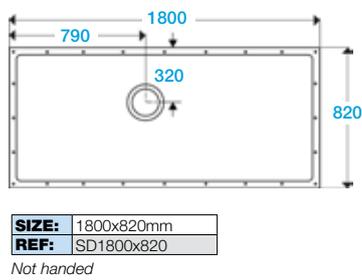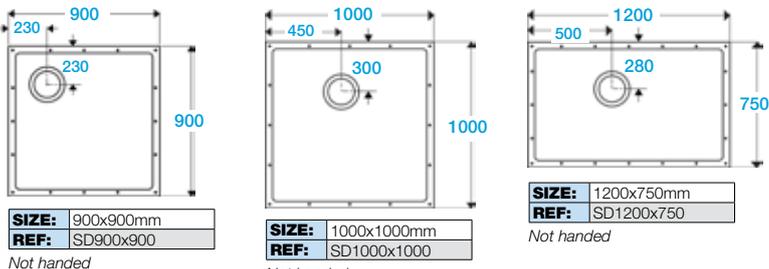

OPTIONS	HANDED	900x900	1000x1000	1200x750	1200x1200	1300x800	1400x900	1500x820	1500x1000	1500x1200	1800x820	1800x900
WF1	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF2	N**	✓	✓	✓								
WF3	N**	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF4	Y		✓	✓	✓	✓	✓	✓	✓	✓		
WF5	N		✓	✓	✓							
WF6	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF7	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF8	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF9	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF10	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF11	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WF12	Y				✓	✓	✓	✓	✓	✓	✓	✓
WF13	Y			✓	✓	✓	✓	✓	✓	✓		
WF14	Y	✓	✓	✓	✓							
WF15	N	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF16	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓		
WF17	Y			✓	✓	✓	✓	✓	✓	✓		
WF18	Y			✓	✓	✓	✓	✓	✓	✓		
WF19	N				✓	✓	✓	✓	✓	✓	✓	✓
WF20	Y	✓	✓	✓	✓							
WF21	Y			✓	✓	✓	✓	✓	✓	✓	✓	✓
WF22	Y				✓	✓	✓	✓	✓	✓	✓	✓
WF23	Y			✓	✓	✓	✓	✓	✓	✓	✓	✓
WF24	Y				✓	✓	✓	✓	✓	✓	✓	✓
WF25	Y				✓	✓	✓	✓	✓	✓	✓	✓
WF26	N					✓	✓	✓	✓	✓	✓	✓
WF27	Y					✓	✓	✓	✓	✓	✓	✓
WF28	Y			✓	✓	✓	✓	✓	✓	✓		
WF29	Y	✓	✓	✓	✓							
WF30	Y	✓	✓	✓	✓	✓						
WF31	Y	✓	✓	✓	✓	✓						
WF32	Y				✓	✓	✓	✓	✓	✓	✓	✓
WF33	Y			✓	✓	✓	✓	✓	✓	✓	✓	✓
WF34	Y			✓	✓	✓	✓	✓	✓	✓	✓	✓
WF35	Y						✓	✓	✓	✓	✓	✓
WFX	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
WFY	Y	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

*WF2 & WF3 are not handed unless doors are unequal widths.

RECOMMENDED FOR SHOWERDEC...

22
Shower doors & glass screens

42
Antibacterial curtains & rails

52
Tanking membrane